




A-6120-TI-H

Key Features

- Air cleaner - weather rated
- Oil pressure sender fitted (19-199ohms)
- Water temperature sender fitted (287-23ohms)
- Stop solenoid
- Painted R13 signal red, UV stabilised
- Easily adjustable throttle control
- Factory tested
- Mounting legs
- Belt covers
- Engine speed magnetic pick-up
- Flywheel drive plate
- Control wiring loom
- 240Vac engine jacket heater fitted
- Exhaust manifold heat shields
- Guards fitted to all rotating parts

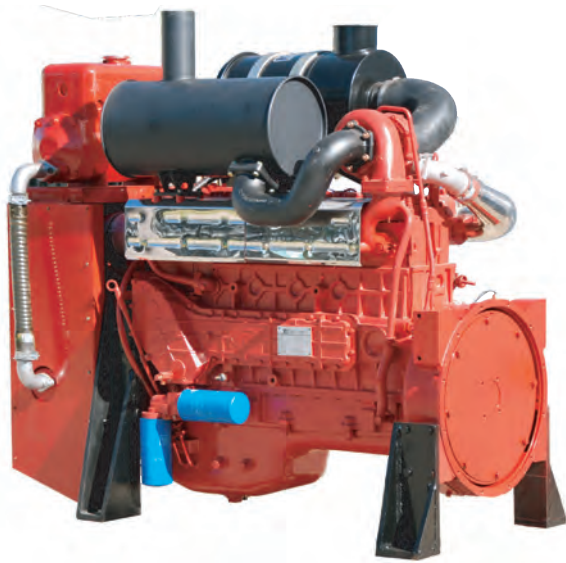

Specifications

Cooling System	CH700 Heat Exchange
Minimum Cooling Water Flow	5.0L/sec @ 20C
Air System	Turbocharged Intercooled
Radiated Heat Load	16kW
Air Consumption	17.02 m³/min
Exhaust Gas Flow	767 L/sec
Exhaust Outlet Size	3 1/2"
Voltage	24Vdc
Fuel Usage at full load	47.3L/hr
Rated Power	200kW
Continuous Power	190kW
Cylinders	6
Net Mass	1050kg
Max rpm	2200
3m Sound level @ 2200rpm	108 dBa
Flywheel	# 14 SAE
Bell Housing	# 1 SAE
Bore and Stroke	102mm x 130mm
Displacement	8.820L
Cold Cranking Amps	650