




# A-6126-TI-H

## Key Features


- Air cleaner - weather rated
- Oil pressure sender fitted (19-199ohms)
- Water temperature sender fitted (287-23ohms)
- Stop solenoid
- Painted R13 signal red, UV stabilised
- Easily adjustable throttle control
- Factory tested
- Mounting legs
- Belt covers
- Engine speed magnetic pick-up
- Flywheel drive plate
- Control wiring loom
- 240Vac engine jacket heater fitted
- Exhaust manifold heat shields
- Guards fitted to all rotating parts

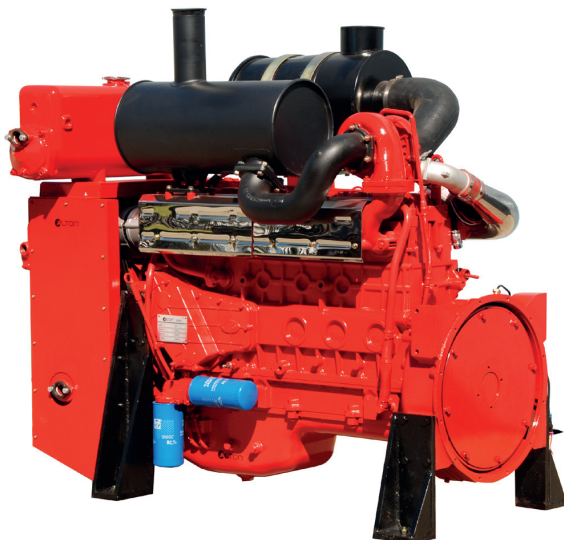

## Specifications

Cooling System	KH200 Heat Exchange
Air System	Turbocharged Intercooled
Radiated Heat Load	28kW
Air Consumption	20.85 m <sup>3</sup> /min
Exhaust Gas Flow	953 L/sec
Exhaust Outlet Size	3 1/2"
Voltage	24Vdc
Fuel Usage	64.4L/hr
Rated Power	275kW
Continuous Power	261kW
Cylinders	6
Net Mass	1100kg
Max rpm	2200
3m Sound level @ 2200rpm	109 dBA
Flywheel	# 14 SAE
Bell Housing	# 1 SAE
Bore and Stroke	126mm x 130mm
Displacement	9.730L
Cold Cranking Amps	650

## Performance Curve

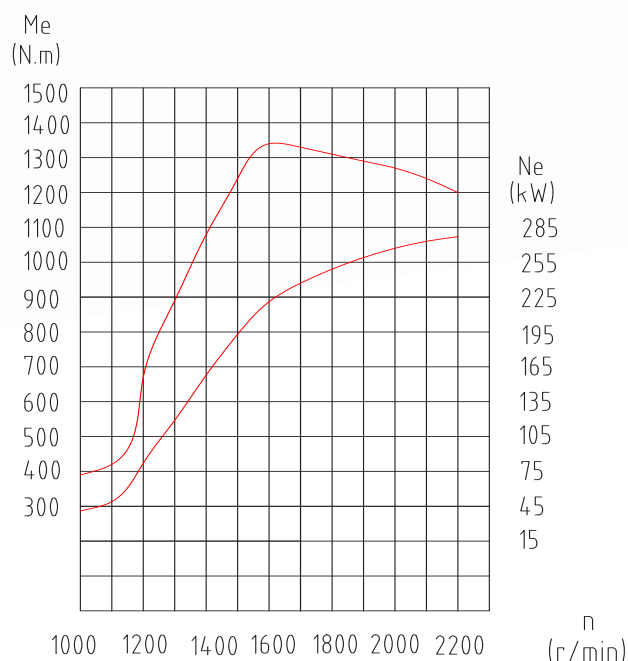

\*De-rate performance by 5% for radiator version

## Power Output Chart

RPM	BHP	kW
1500	257	192
1600	302	225
1700	318	237
1800	334	249
1900	347	259
2000	361	269
2100	363	271
2200	371	277

Performance figures shown do not include cooling fan and other parasitic losses. Tolerance +/- 5%.

## Schematics

